

LowandMean.com  
928.680.6660

## KAWASAKI MEAN STREAK LOW SEAT PAN

Part # LM-01-400

# INSTRUCTIONS


LM-01-400 includes:	<b>WARNING:</b> Do not install with the engine warm. This is an install at your own risk. If you feel you are not capable of installing this part successfully then we highly suggest you take this item to a professional shop. Always check the fit before sending this product off to be finished.
1 Double sided tape	
<b>Tools needed:</b>	
10mm socket wrench	
8mm socket wrench	
Rubber hammer	
Phillips screw driver	

- 1) Remove the stock seat. Use a 10mm socket wrench for the side bolts and an 8mm socket wrench for the rear bolt that is attached to the rear fender.
- 2) Next, remove the tip over sensor which is bolted to the fender support under the seat. Use a 10mm socket wrench to remove the bracket from the sensor and just relocate sensor with double sided tape to the left side. (Photo A)
- 3) Apply the double sided tape (Included) to the tip over sensor (Photo B)
- 4) On the back side of the gas tank there are breather lines. (California Model has two) These need to be very softly rubber hammered down  $\frac{1}{4}$ ". This helps the LSD fit better to the tank lines.
- 5) Remove the side covers (Use a Phillips screw driver and for the other side you can use a key). This is so you don't scratch the side cover during install.
- 6) Install the LSD. Wait to remove the Velcro until the pan fits correctly.
- 7) You will have to press down on the center of the pan to get the front hook to slide under the frame area.
- 8) Re-install the side covers to make sure they fit perfectly below the seat pan (should be  $\frac{1}{4}$ " gap).
- 9) Lastly, clean fender where the Velcro will stick. Remove the adhesive cover on the Velcro and set the pan in place. Press hard on the rear of the pan so the Velcro sticks well.
- 10) Once everything fits and looks good, send the pan off to be shaped and covered.

Photo A



Photo B

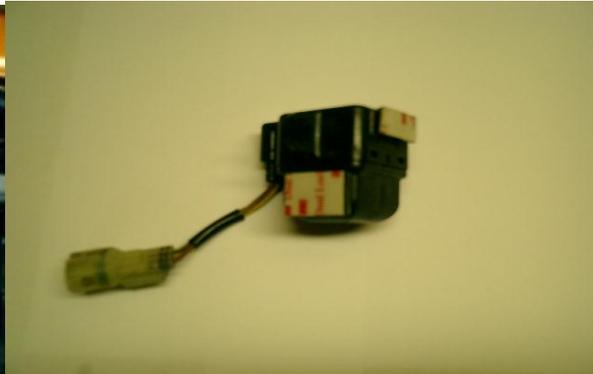

Please contact our Tech support if you have any issues or questions on install  
[Techsupport@LowandMean.com](mailto:Techsupport@LowandMean.com) or 928.680.6660