


Brake Light Pod Instructions:

- Simply wire the Power Cord (Red) of the Pods to the brake switch of the motorcycle. Connect Ground (Black) to chassis. [See Wiring Instructions]
- Position the Pods rear facing for added attention and safety when braking.
- Based on the placement of the Pods, you may have excess wire to each Pod. Retain with supplied Cable Ties (included in packaging) and secure away from moving parts.
- Once the engine is turned on, the Pods will flash in unison with the use of the brakes.

Diagram

⚠ Caution: Please connect only to brake light side of brake light switch.

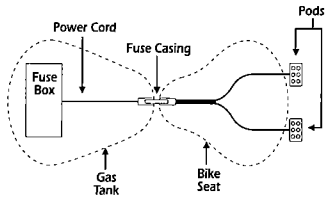

This diagram does not depict all motorcycle layouts. Please consult the Owner's Manual for exact positioning of the brake switch.

Adhesive Mounting Instructions:

- Remove backing from one side of double-sided foam mounting tape, and attach to back of the Brake Pod.
- Remove backing from the other side of the double-sided foam mounting tape, and attach to desired location. [Properly clean desired location before application]




Hard Mounting Instructions:

- Using a screwdriver, remove bottom casing of Brake Pod.
- Mount using four screws inserted through bottom of casing as shown (screws not included).
- Attach double-sided foam mounting tape to bottom of Brake Pod and re-insert into bottom casing.

Warning:

Only mount Pods rear facing to be seen in conjunction with your brakes. Failure to do so may pose a risk to you and other drivers, as well as an illegal procedure. If you are unsure of the installation procedure, please consult a qualified automotive/motorcycle installer. This product is not intended for the use of children under the age of 7 years. Some States prohibit the use of specific light colors on motor vehicles; check with local authorities prior to the use of this product. Please obey all traffic laws.

Wiring Instructions:

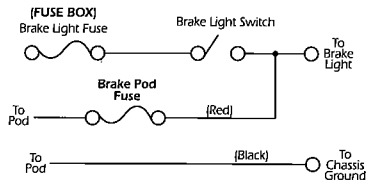

Connect only to brake light side of brake light switch.

Fuse Replacement Instructions:



- Turning counterclockwise, unscrew fuse casing.
- Remove and discard old fuse.
- Replace with .5 Amp fuse.
- Turning clockwise, screw casing back together.

Caution: Replace fuse only with 5 Amp fuse.