



POWER POINT 1483

WITH CLUTCH-BRAKE PERCH MOUNT

FITS: UNIVERSAL FOR CLUTCH OR BRAKE PERCH MOUNTING BOLTS VERTICAL SPACING CENTER TO CENTER AT 1-1/8" TO 1-5/8" APART TO ACCEPT INCLUDED M6 X 1 OR 1/4"-20 BOLTS.

HONDA: ALL GL1500/1800 MODELS, ALL VTX 1300/1800 MODELS, SHADOW 750 AERO, ACE & SPIRIT, SHADOW 1100.

KAWASAKI: ALL VULCAN 900 MODELS, VULCAN 1500/1600 INCLUDING MEAN STREAK, ALL VULCAN 2000.

SUZUKI: BOULEVARD M/C 50,C90,M109.

YAMAHA: ALL ROAD STAR & WARRIOR MODELS, ALL V STAR MODELS, ALL VENTURE MODELS.

H-D: CLUTCH OR BRAKE PERCH MOUNTS, ALL '82-UP MODELS

PARTS INCLUDED

- 1 Electrical Power Point w/Clutch-Brake Perch Mount
1 Wiring Harness
1 Hardware Kit Including:
1 5/16 Lock Washer
1 5/16-18 x 7/8 Button Head Cap Screw
1 Dielectric Grease
10 Cable Ties 6"
2 Washers
2 Aluminum Spacers
2 M6 x 1.0 x 45mm Button Head Cap Screw
2 1/4-20 x 2" Button Head Cap Screw
2 1/4-20 x 1 3/4 Button Head Cap Screw
1 Stamped Power Point Mount
1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KURYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of hex wrenches,

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
The product must be properly installed, maintained and operated under normal conditions.
Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.

PROOF-OF-PURCHASE

kuryakyn.com




PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

STEP 2 Place a clean, soft blanket over the gas tank to protect the paint.

CAUTION! Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.


STEP 3 Remove the bottom screw securing the clutch perch halves as shown in PIC 1; this will not be used again.

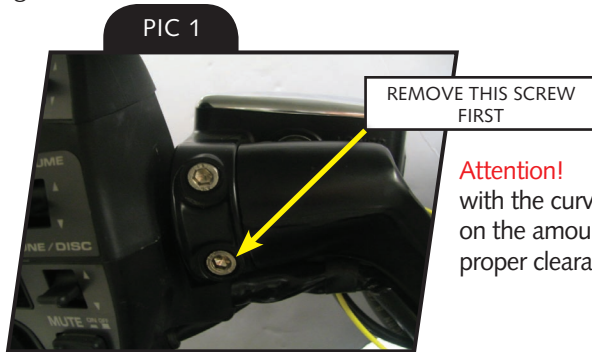

Attention! The Power Point mount can be mounted with the curved top toward the top or bottom depending on the amount of clearance is needed. Always check for proper clearance before operation of the vehicle

STEP 4 Identify the correct screw, either the metric or standard, by comparing threads on the included screws to the threads from the screws that were removed (the long 1/4-20 screws are generally used in older H-D motorcycles.)

STEP 5 Place the washer over the screw, then insert through the control mount arm and place the spacer over the screw as shown in PIC 2.

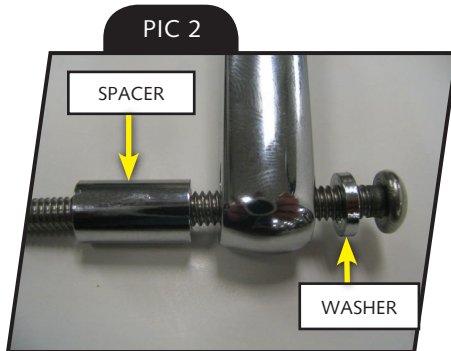

STEP 6 Place the arm, screw washer and spacer on the perch and start the screw. Do not fully tighten the screw yet.

STEP 7 Remove the upper PIC screw securing the perch mounting halves; it will not be used again.

STEP 8 Rotate the arm up into position and install the screw, washer, and spacer in the same order as in STEP 5.

STEP 9 Tighten both of the screws securing the arm.

STEP 10 Turn the handlebars in both directions to their full stop position and ensure that there is clearance between the mounting plate/accessory and the gas tank, dash and other accessories.

WARNING! ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED, INSUFFICIENT CLERANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH.

PROCEDURE FOR MOUNTING THE POWER POINT

STEP 1 Secure the power point to the mount with the 5/16 Lock Washer and 5/16-18 x 7/8 Button Head Cap Screw up through the bottom and into the power point housing.

STEP 2 Route the wiring from the power point along the handlebars and down towards the neck; secure the wires with the included cable ties.

STEP 3 Route the harness from the power point towards the battery. Use the include cable ties from the hardware kit to secure the wiring harness out of the way of pinch points, extreme heat and moving parts.

STEP 4 Connect the power wires from the wiring harness with inline fuse to the terminals on the battery.

STEP 5 The wire with a black end is a ground wire and needs to be secured to the negative terminal on the battery. The wire with a red end (with in-line fuse) is a power wire and needs to be secured to the positive terminal on the battery.

ATTENTION! Secure all wiring away from any moving parts, pinch points or extreme heat. Küryakyn WILL NOT warranty any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

STEP 6 Connect the two wiring harnesses together.

ATTENTION! Küryakyn recommends the use of dielectric grease on electrical connections.

STEP 7 Make sure that all wiring is secured away from pinch points, moving parts and extreme heat.

STEP 8 Adjust the power point as necessary to achieve sufficient clearance.

CAUTION! Ensure that the wires are not pinched or stretched at any point when the handlebars are turned to their full stop position on either side.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

Küryakyn[®]

Ride On!

PAGE

3

POWER POINT

INSTALLATION