



TECH-CONNECT POUCH W/ACCESSORY BAR MOUNT

4128

PARTS INCLUDED

- 1 Tech-Connect Pouch Assembly
- 1 Thick Foam Pad
- 1 Thin Foam Pad
- 1 1-1/4" Front Handlebar Clamp Half
- 1 1-1/4" Rear Handlebar Clamp Half
- 1 Hardware Kit Containing:
 - 1 1" Reducer Halves—Thinner
 - 1 7/8" Reducer Halves—Thicker
 - 1 1/4" Flat Washer
 - 1 1/4" Lock Washer
 - 1 1/4"-20 Acorn Nut
 - 2 #8-32 X 3/4" Phillips Head Pan Screws
 - 2 #8-32 Nylock Nuts
 - 1 Anti-seize Package
 - 1 Nylon Locking Nut
 - 1 Ball Stud
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTICES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING	THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.
NOTICE	This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.
CAUTION	This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

NOTICE

IF INSTALLING THIS PRODUCT FOR ANOTHER PARTY, PLEASE MAKE SURE THEY RECEIVE THIS COPY OF THE INSTALLATION INSTRUCTIONS SO THEY ARE AWARE OF THE IMPORTANT INFORMATION CONTAINED IN THEM.

TOOLS SUGGESTED

Small Phillips Head Screwdriver, Set of Combination Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.

- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.




CAUTION Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.

NOTICE It is the installer's responsibility to ensure that there is adequate clearance between the Tech-Connect and any painted surfaces. Küryakyn is not responsible for any damage due to inadequate clearance.

NOTICE Be aware of any cables/wires that could potentially be pinched or crushed while using this product.


STEP 2 Determine the diameter of the bars, 7/8", 1" or 1-1/4", that are on the motorcycle. The Tech-Connect Handlebar Mount includes reducers that allow it to fit these sizes. Use the thicker set for 7/8" bars, the thinner set for 1" bars (these reducers are marked with their size on the inside, PIC 2) and the clamp halves alone for 1-1/4" bars. PIC 1 and PIC 2

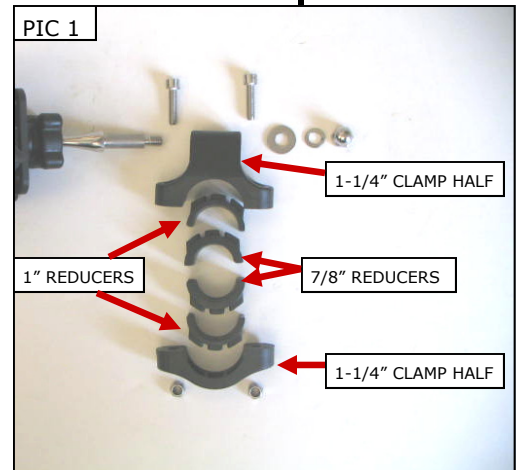


NOTICE Ensure that the supplied anti-seize is applied to all threaded fasteners before installation; this will make future removal of the fasteners easier.

STEP 3 Using the correct clamp reducers (if needed-PIC 1), install the clamp to the desired location on the handlebars with the included #8 Phillips head cap screws and #8 nylock nuts. PIC 3

STEP 4 Install the Ball Stud to the handlebar mount by inserting the metal shaft through the hole in the handlebar mount. The hex flats on the metal shaft will line up with the hex flats in the hole. PIC 4 Secure the Tech-Connect with the included 1/4" flat washer, then the 1/4" lock washer, then the Acorn nut. PIC 5 Tighten securely.

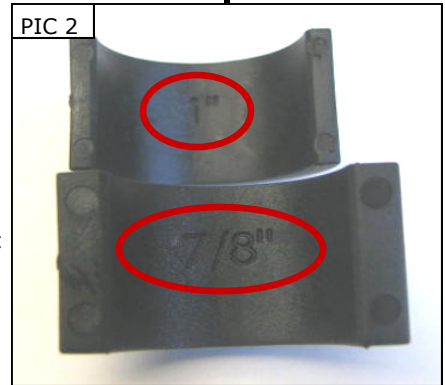

STEP 5 Place the nylon locking nut over the ball end of the Ball Stud. Install the Tech-Connect Pouch to the Ball Stud by inserting the ball into the fingers on the Pouch back plate. PIC 7 Thread the nylon lock nut onto the fingers. Tighten the lock nut to the desired tension. See Step 9, Page 3 for further information on the lock nut.

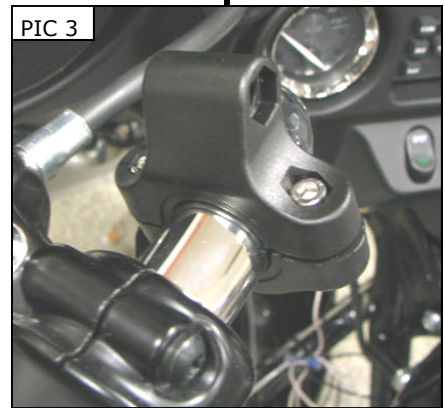

NOTICE It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.


WARNING TO PREVENT POSSIBLE LOSS OF CONTROL, WHICH COULD RESULT IN A POSSIBLE INJURY OR DEATH, WE DO NOT RECOMMEND REMOVING, REPLACING OR ADJUSTING THE DEVICE IN THE TECH-CONNECT WHILE RIDING THE MOTORCYCLE.

USING THE TECH-CONNECT POUCH

NOTICE Protect the clear window from damage, tools may scratch the window surface.

STEP 6 There are two different thicknesses of foam padding included with the Tech-Connect Pouch. The thinner pad will be used with most devices, the thicker pad with the super thin devices. The thin pad will provide a cushion layer between the back plastic mount inside the bag and any uncased mobile device.

NOTE: The foam inserts included fit inside the pouch and can be cut-to-fit to secure smaller GPS units as well as other small electronics or accessories. PIC 6

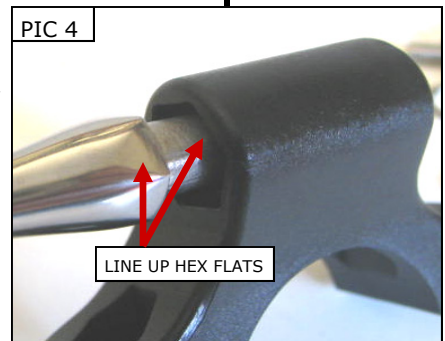

-cont.-

STEP 7 To remove the Tech-Connect Pouch from the bike for storage, loosen the nylon lock nut on the back side of the holder until it clears the threads. PIC 7 Snap the Tech-Connect Pouch off of the ball. PIC 8 Remove the nylon lock nut and thread it to the Tech-Connect Pouch for storage.

STEP 8 To replace the Tech-Connect on the swivel ball, remove the nylon lock nut from the back. Slide the lock nut over the swivel ball, snap the Tech-Connect back on the swivel ball and thread the lock nut onto the Tech-Connect. Tighten the lock nut to the desired tension.

STEP 9 To adjust the angle of the Tech-Connect Pouch, loosen the nylon lock nut, adjust the Tech-Connect Pouch to the desired position and tighten the lock nut. PIC 5 The lock nut will allow you to keep the Tech-Connect Pouch in the same position or, with a little less tightness, allow you to move the Tech-Connect Pouch on the swivel ball.

NOTICE Küryakyn is not responsible for items that may be stolen or damaged in relation to the use of this product.

WARNING ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED. INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH.

NOTICE Ensure that the Mobile Device is secure in the Tech-Connect Pouch. Küryakyn is not responsible for any Device that is damaged from use in this Pouch or from the Pouch not being properly secured to the motorcycle.

NOTICE The Tech-Connect Pouch is not waterproof. Remove the Mobile Device and stow during inclement weather. Küryakyn will not be responsible for any Mobile Device damaged when using this pouch.

NOTICE Motorcycling can be done in a harsh environment. Make sure your Mobile Device is appropriate for this application.

WARNING DO NOT ATTEMPT TO OPERATE OR REMOVE THE MOBILE DEVICE FROM THE POUCH WHILE OPERATING THE MOTORCYCLE.

NOTICE It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

