



311 #1 Industrial Way - Fallbrook, CA 92028 - USA

Phone: (760) 731-1200 Fax: (760) 731-1284

E-mail: tech@baronscustom.com

Website: www.baronscustom.com

Foot Control Relocation Kit V-Star 1100 Custom BA-7241-00

Please read **ALL** of the instructions **BEFORE** beginning the installation

Parts List:

- (2)-Relocation Plates
- (2)-Brake extensions
- (2)-Shift rods
- (1)- $\frac{3}{4}$ " black rod, tapped on both ends
- (2)-M10mm flange nuts
- (8)-M10x30mm chrome socket screws
- (1)-M8x40mm stud

NOTE: We recommend the use of Blue Loctite on all fasteners and mounting hardware

This kit will relocate the stock controls on 1999~2003 V-Star 1100 Custom models. The kit will move the controls forward either 2" or 4". See photo #1 for the 4" relocation and see photo #2 for the 2" relocation. Decide on the amount of relocation you desire and start your installation.

- Remove shift rod from left foot control. Remove two nuts from rod, noting one is a left thread. Place these two nuts onto new shift rod supplied. Use the longer rod for 4" relocation and shorter rod for 2" relocation.
- Remove left foot control bracket from frame.
- Install one of the relocation plates into frame where footrest bracket was removed.
- Reinstall footrest bracket onto relocation plate in the desired position. The two center holes will give 2" of forward movement; the two forward holes will give 4" of forward movement.
- The supplied $\frac{3}{4}$ " black rod acts as a nut for the forward mounting bolt in both 2" and 4" positions. It also adds stability for the footrest so flex is eliminated.
- Reinstall shift rod and tighten jam nuts (blue Loctite is suggested).
- Disconnect brake rod at clevis and remove the two nuts from stock brake rod.
- Remove right footrest bracket and install relocation plate as you did on left side.
- Install brake rod extension with supplied stud, and stock nut to clevis on the brake pedal. The extension will act as the nut (blue Loctite suggested). Refer to photo #3.
- Reinstall right footrest bracket to relocation plate with supplied hardware. See photo #4.
- Recheck clearances on shift and brake pedal and adjust as necessary for comfort and fitment with other installed items like engine guards and highway bars.

Our install guides provide a basic outline on the proper installation of our products. Further tuning and/or fitment may be required. Baron bears no responsibility on installation costs associated with this product.

Revision 1.0 (12/03)

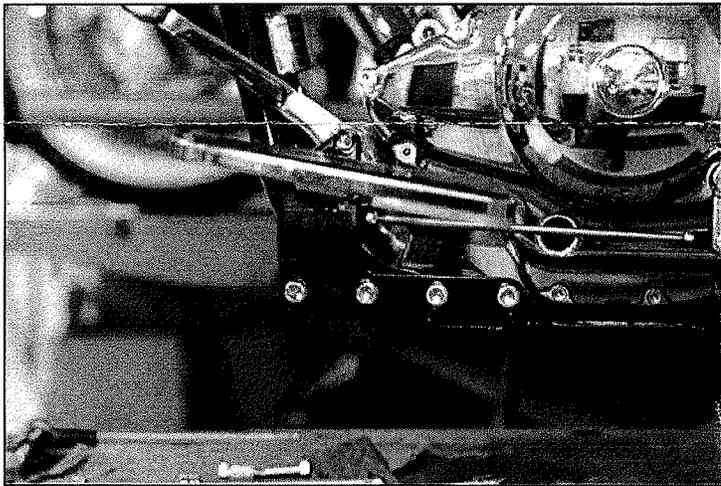


Photo 1

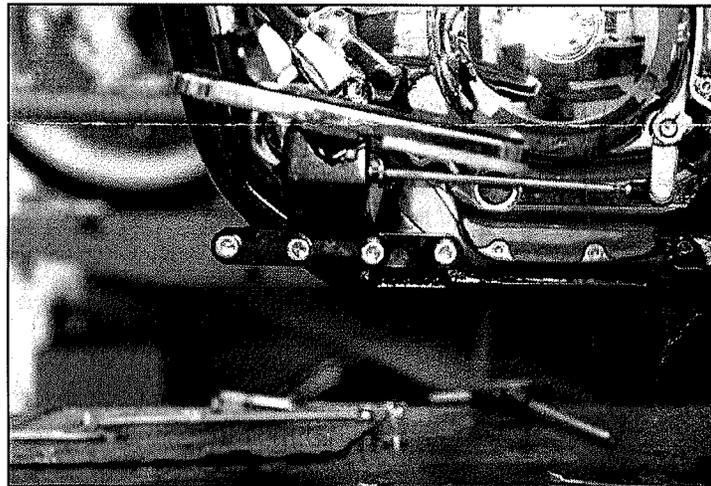


Photo 2

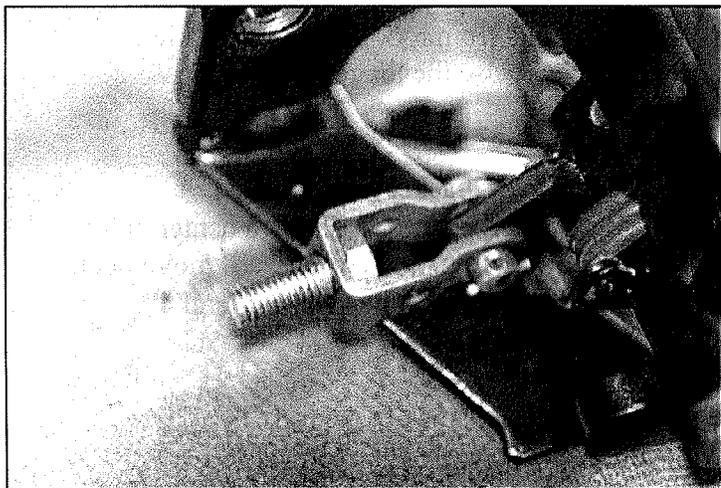


Photo 3

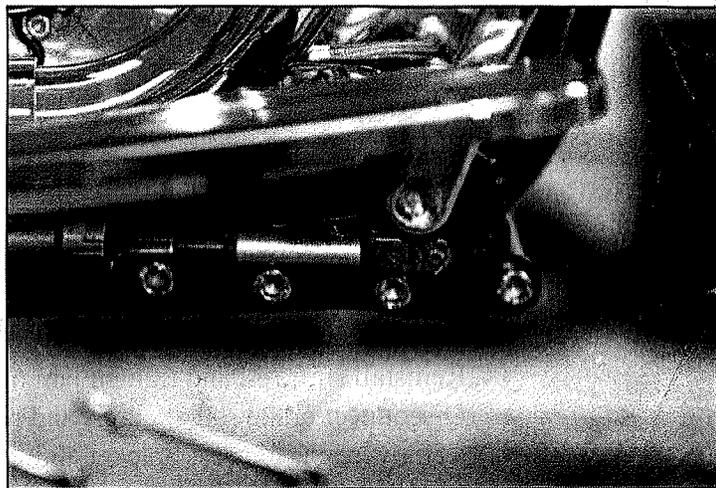


Photo 4