



INSTALLATION



DRIVER FLOORBOARD KIT 4038

FITS: '01-UP GL1800

PART #	INCLUDED
604038	1 Shift Side Floorboard Assembly
604038R	1 Brake Side Floorboard Assembly
604038B	1 Brake Lever Assembly
	1 Pin Drive Wrench
904038	1 Hardware Kit Including:
	1 Lower Shift Fork Bushing
	1 Upper Shift Fork Bushing
	4 #6 x 1/2" Pan Head Sheet Metal Screw
	4 1/4-20 x 5/8 Socket Head Cap Screws (SHCS)
	1 Deploy Hook
304038	1 Installation Instructions

THANK YOU FOR CHOOSING KURYAKYN!

- WARNING!** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.
- WARNING!** YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.
- CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.
- CAUTION!** Ensure that the installation of this product does not interfere with the proper operation of the motorcycle before riding.
- ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.
- ATTENTION!** It is the installer's responsibility to ensure all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn WILL NOT warranty components lost due to improper installation. Periodic maintenance may be required.
- IMPORTANT** These driver floorboards are not compatible with the Fish kickstand. Depending on the particular design and configuration, they may not be compatible with other aftermarket kickstands either.
- NOTE** We suggest that you use medium strength thread lock (blue) on the fasteners that secure the Floor Board to the frame.

-cont.-

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY
Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA All Rights reserved.

PROOF-OF-PURCHASE

kuryakyn.com




PROCEDURE — SHIFT SIDE

STEP 1 Position the deploy hook over the threaded holes on the underside of the shift-side floorboard. See [PIC.1](#).


STEP 2 Secure the deploy hook with the included 1/4-20 x 5/8 Socket Head Cap Screws (SHCS); tighten the screws.

STEP 3 Remove the rubber sleeve from the stock shift peg by inserting your long shank, small tip, flat head screwdriver between the shift peg and the rubber. Work the screwdriver around the peg prying outward slightly until the rubber sleeve can be slid off of the peg. Applying a small amount of liquid soap will help ease removal.

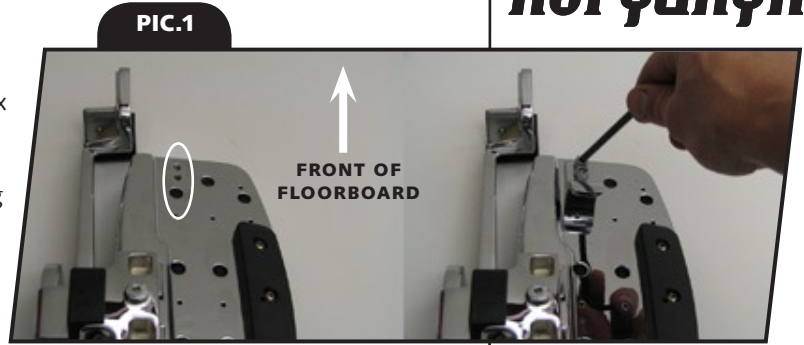

STEP 4 Using a 6mm hex key or driver, remove the two socket screws that hold your shift side OEM peg mount to the frame and remove the OEM peg mount. See [PIC.2](#). Set the OEM hardware aside, it will be reused.

STEP 5 Install the Shift Fork Bushing halves to the shift peg using the four supplied #6 x 1/2" Pan Head Sheet Metal Screws. For clarity in [PIC.3](#), we show the bushing installed with the screws visible from the top, however, for the appearance we recommend the screws be positioned on the bottom.

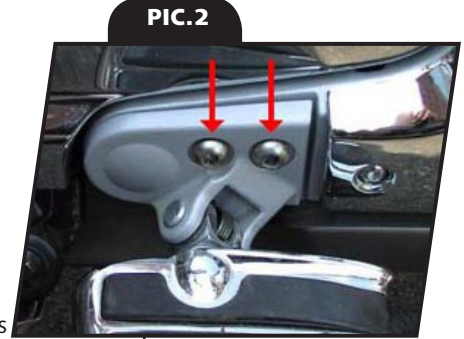

STEP 6 To avoid scratching the upper surface of the heel-toe shift arm, place a couple layers of sturdy tape on the lever before proceeding ([PIC.4](#)). Electrical or heavy masking tape are easiest to remove.

IMPORTANT

Use the Pin Drive Wrench and recheck to make sure the pivot shaft bolt is tight.

STEP 7 Slide the "U" shaped section of the toe shift arm around the Shift Fork Bushing. See [PIC.5](#). Using the OEM hardware removed in STEP 4, fasten the floorboard assembly to the frame. See [PIC.6](#). Tighten the screws to 20 foot-pounds of torque.





STEP 8 Verify that you have clearance on all moving parts and that nothing is binding.

PROCEDURE — BRAKE SIDE

STEP 1 Using an M6 hex key or driver, remove the two socket screws that hold your brake side OEM peg mount to the frame and remove the OEM peg mount. Set the OEM hardware aside, it will be reused.

STEP 2 Remove the right side engine side cover. The rear edge is secured by two bosses pressed into rubber grommets. The front edge is located by a slot that slips over a tab. Carefully pull the rear edge outward until it is free of the grommets and then move the cover rearward to remove it from the front tab. Work carefully to avoid damaging the cover.

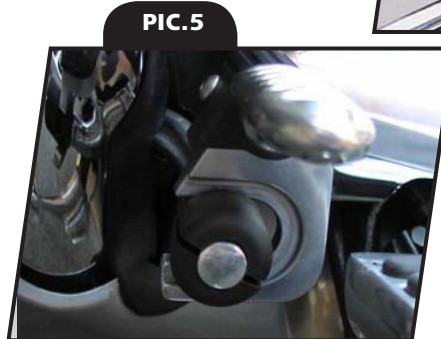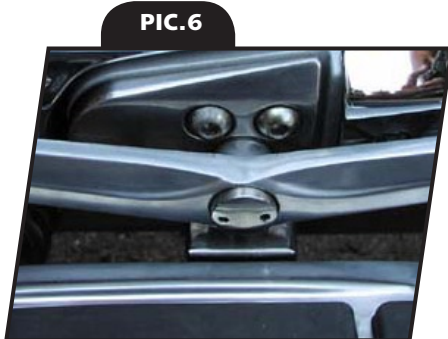

STEP 3 With a 12mm open-end wrench or socket, remove the OEM brake lever pinch bolt then remove the lever. Set the pinch bolt aside, it will be reused.

STEP 4 Hold the splined brake shaft outward, align the dot on the end of the shaft with the slit in the brake pedal and slide the pedal onto the shaft. See [PIC.7](#). We recommend the shaft be held outward by hand. If that is not possible, carefully hold the shaft in place with a screwdriver LIGHTLY propped against the brake slave cylinder. Install the OEM pinch bolt in the brake pedal and torque to 20 foot-pounds of torque.

CAUTION! Do not pry against the brake slave cylinder in an effort to hold the splined brake shaft in place! If the pedal will not slide onto the shaft with minimal resistance, determine the cause of the problem and correct it. Prying against the brake slave cylinder could damage the brake slave cylinder, its mounting tabs, or the brake light switch assembly.

STEP 5 Turn on the key and verify that your rear brake switch is operational. If the brake light is stuck on or won't illuminate, verify the actuation plate on the linkage rod between pedal and the slave cylinder is was not bumped out of position in STEP 4.

STEP 6 Using the OEM hardware removed in STEP 1, install the Brake Side Floorboard Assembly. Tighten the screws to 20 foot-pounds of torque.

STEP 7 Sit on the bike and confirm the brake pedal is comfortably located. If it feels too high or too low, repeat STEP 4 through STEP 6 relocating the brake pedal one spline in the appropriate direction.

STEP 8 Reinstall the side cover. Apply soapy water to the tab and grommets if needed.

WARNING! FAMILIARIZE YOURSELF WITH THE POSITION AND FUNCTION OF THESE CONTROLS BEFORE OPERATING THE MOTORCYCLE ON PUBLIC STREETS, ROADS, OR HIGHWAYS. FAILURE TO BE COMPLETELY COMFORTABLE WITH THE OPERATION OF THESE CONTROLS COULD RESULT IN A CRASH OR COLLISION RESULTING IN INJURY OR DEATH.

Kuryakyn®

PIC.7



Ride On!

PAGE

3

DRIVER FLOORBOARD KIT INSTALLATION