

## INSTALLATION INSTRUCTIONS

### CHIN FAIRING FOR INDIAN®, CHROME

5664

#### THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

**WARNING** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**CAUTION** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

**NOTICE** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

#### ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- |   |               |   |   |
|---|---------------|---|---|
| 1 | Chin Fairing  | 1 | Hardware Kit, containing:                   |
| 1 | Upper Bracket | 4 | M6 x 1mm x 16 Hex Drive Flanged Head Screws |
| 1 | Lower Bracket | 2 | M6 x 1mm x 25 Hex Drive Flanged Head Screws |
|   |               | 2 | Chin Fairing Bracket Spacer                 |

#### YOU WILL ALSO NEED:


Metric socket wrench set, socket extension set, universal swivel joint, combination wrench set, hex key set

**NOTICE** THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

**STEP 2** Refer to PIC 2. On the underside of the bike locate the voltage regulator and the oil filter. Remove the lower screw mounting the voltage regulator to the bike, located in between the voltage regulator and oil filter. Set hardware aside, it will be reused.

**STEP 3** Refer to PIC 3 and 4. Locate provided Lower Bracket. Align the single hole side of the bracket with the mounting hole located between the voltage regulator and the oil filter. The two hole side of the bracket should be pointing towards the rear of the bike. Fasten Lower Bracket to the bike using the hardware removed in Step 2.

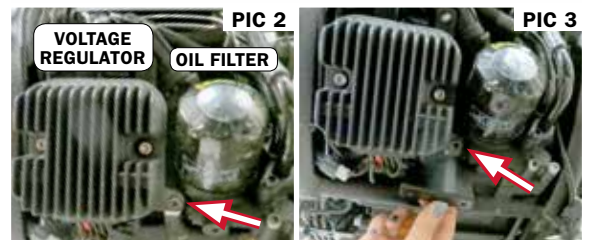

## INSTALLATION INSTRUCTIONS


### CHIN FAIRING FOR INDIAN®, CHROME

5664

-CONTINUED-

**FOR INDIAN BIKES WITH AN OIL COOLER, PROCEED TO STEP 4**  
**FOR INDIAN BIKES WITHOUT AN OIL COOLER, PROCEED TO STEP 12**

**STEP 4** Refer to PIC 5. Remove the screw that is fastening the oil cooler to the upper left (clutch) side frame. Set hardware aside, it will be reused.

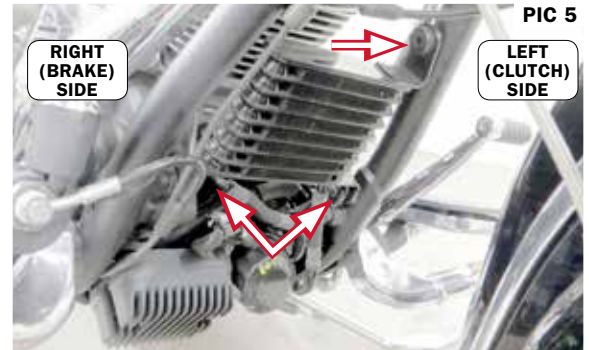

**STEP 5** Refer to PIC 5. Remove hardware under the oil cooler that is fastening it to the lower left and right portion of the frame. Set the grommet and insert assembly and lower radiator mount bushing aside, they will be reused.

**STEP 6** Refer to PIC 6. Locate provided Upper Bracket. Align and place the bracket inside the mounting bracket frames, located on the bottom, of the oil cooler. Align the mounting holes of the oil cooler and Upper Bracket with the frame of the bike.

**STEP 7** Locate provided two (2) M6 x 1mm x 25 Hex Drive Flanged Head Screws. Place the radiator mount bushing, that was removed in Step 5, onto one of the screws.



**STEP 8** Lightly pull forward on the oil cooler from the lower right (brake) side to gain access to the back side of the oil cooler and the bracket. Align the mounting holes of the bracket, oil cooler and left (clutch side) frame. Insert the screw and bushing assembly through the aligned mounting holes, on the back side, and fasten it to the frame of the bike.



**STEP 9** Refer to PIC 7. Locate the grommet and insert assembly that was removed in Step 5. Place it onto the remaining M6 x 1mm x 25 Hex Drive Flanged Head Screw. From the backside of the oil cooler and Upper Bracket, insert the hardware assembly through the aligned mounting holes and fasten it to the right (brake) side frame. Fully tighten hardware.

*Note: You will need a long extension piece, and may need to use a universal swivel joint, in addition to your metric socket to gain access to the screws located behind the bracket.*



**STEP 10** Refer to PIC 8. Using the hardware that was removed in Step 4, refasten the oil cooler to the upper left (clutch) side frame.

**STEP 11** Proceed to Step 16.

**FOR INDIAN BIKES WITHOUT AN OIL COOLER ONLY**

**STEP 12** Remove existing hardware from the left (clutch) and right (brake) side front tube frames. Set hardware aside, it will not be reused.



**STEP 13** Refer to PIC 9 and 10. Locate provided Upper Bracket, two (2) Bracket Spacers, and two (2) M6 x 1mm x 25 Hex Drive Flanged Head Screws. Place a spacer onto each of the screws.



## INSTALLATION INSTRUCTIONS

### CHIN FAIRING FOR INDIAN®, CHROME

5664

-CONTINUED-

**STEP 14** Align the mounting holes of the bracket with the tube frame, the mounting point of the bracket pointing towards the rear of the bike.

**STEP 15** Proceed to Step 16.

#### FOR BOTH BIKE TYPES


**STEP 16** Refer to PIC 11. Locate provided Chin Fairing and four (4) M6 x 1mm x 16 Hex Drive Flanged Head Screws. Align the Chin Fairing's mounting holes with the Upper and Lower Brackets. Using two (2) of the screws, lightly fasten the Chin Fairing to the Lower Bracket first.

**STEP 17** Refer to PIC 12. Using the remaining two (2) M6 x 1mm x 16 screws, fasten the Chin Fairing to the Upper Bracket. Fully tighten both upper and lower fasteners.

*Note: Be careful to not over tighten screws.*

#### NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.

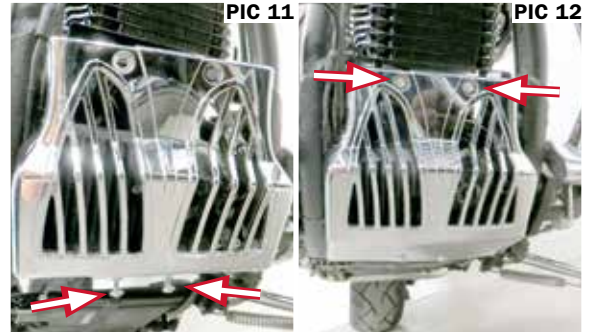

## INSTALLATION INSTRUCTIONS

### CHIN FAIRING FOR INDIAN®, CHROME

5664

-CONTINUED-

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

#### ©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice).

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at [www.kuryakyn.com/legal-notice](http://www.kuryakyn.com/legal-notice)